



MAG-GAGE® THE SUPERIOR MAGNETIC LEVEL GAUGE

- Patented Wide-Flag®
Solid Design Magnet
-350° / 1100° F rating
- Standard 2 to 4 week delivery
Expedited delivery available
- Constructed to meet ANSI/ASME
codes B31.1/B31.3 Min. Sch 40
- No Pressurized Floats
- All Welds are GTAW/TIG
No MIG or T-Drilling
- Replaces Sightglasses




The Process Level Technology Mag-Gage® is a proven method to measure liquid levels. The Mag-Gage® is one of the safest and most economical ways to measure and control your level requirements. It can be installed on almost any shape, size or type of vessel in the industry. In applications of extreme pressure, temperature, vibration and highly corrosive or hazardous material the Mag-Gage® will perform where others fail.

Principles of Operation

The Chamber is constructed of non-magnetic materials, and process connections to mate with those of the tank, vessel or other equipment where the level is to be measured.

The Float is engineered and located inside the Chamber. It is sized and weighed to the specific gravity of the process fluid to be measured. The float contains a 360° Magnetic Assembly which generates a strong uniform magnetic circuit. The magnetic Flux Lines generated by the float interlocks with the indicator. The hermetically sealed Indicator, the Wide Flag® or Wide Tracker® Style, contains its own magnetic assemblies which interlock with the float through the Chamber, providing a strong and reliable design. As the Float moves with the changes in the liquid level, the magnetic attraction between the Indicator and Float will ensure that the Indicator will track the position of the float exactly and the liquid level is measured precisely.

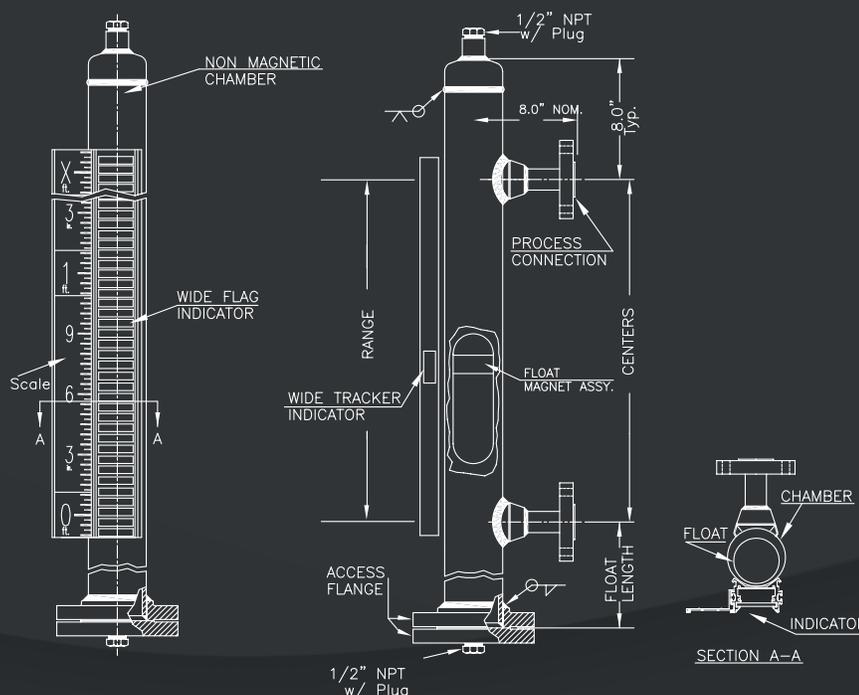

INDICATORS



Wide Tracker®



Wide Flag®
(Patented)

Wide Tracker®

- Extra Large Rectangular Indicator
- 1.40" Wide X 1.5 Long
- Bright Yellow (other colors available)
- Dual Magnetic Coupling

Wide Flag®

- Easy to read 1.40" Wide-Flag (Visible from 200+ ft.)
- Patented solid one piece ceramic magnetic flag
- 180 degree rotation
- Temperatures from -350°F to 1100°F
- High contrast Yellow (liquid) and Black (vapor)
- Other color combinations available

Available Enclosures:


Anodized Aluminum or 316 Stainless Steel

Scales

- Scale can be customized to any increments (ft./in., gallons, percent, metric, etc.)
- All scales are photo etched into Stainless Steel - No rusting, fading or stickers falling off
- Large, easy to read markings that allow measurement to be taken from a safe distance

Scales Available In:

- Feet/Inch Standard
- Metric
- % Scale
- 10ths Scale
- Wide Acrylic Scale
- Gallon Scale
- +/- Scale
- Inch only Scale

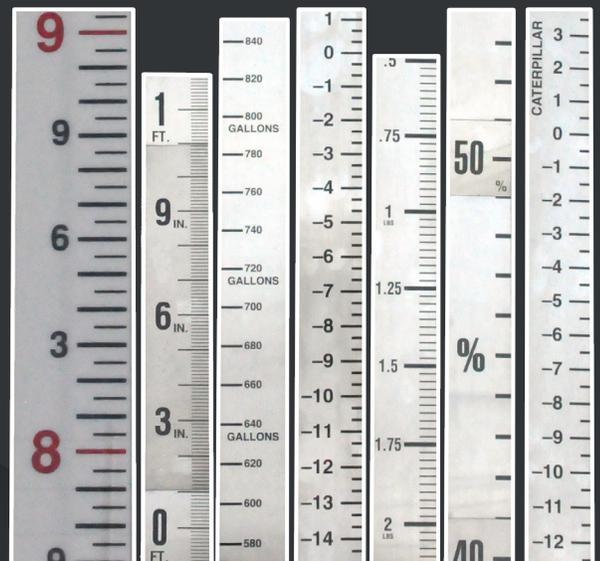

POINT LEVEL SWITCHES



MGS-200EX & MGS-200EX/2

Type	Electrical
Volts	150 VAC / VDC
Current	1.0 AMPS
Power	25 Watts
Contacts	SPDT or DPDT
Deadband	½ inch
MAWT	-40°F to +800°F
Enclosure	NEMA 4X
Connection	¾" FNPT

MGS-700EX & MGS-700EX/2


Type	Electrical
Volts	125/250 VAC
Current	10.0 Amps
Power	2500 Watts
Contacts	SPDT or DPDT
Deadband	½ inch
MAWT	-40°F to +600°F
Enclosure	NEMA 4X
Connection	¾" FNPT

MGS-500EX & MGS-500EX/2

Type	Electrical
Volts	500 VAC/VDC
Current	3.0 AMPS
Power	100 Watts
Contacts	SPDT or DPDT
Deadband	½ inch
MAWT	-40°F to +800°F
Enclosure	NEMA 4X
Connection	¾" FNPT

MGS-900EX & MGS-900EX/2

Type	Electrical
Volts	125/250 VAC
Current	15.0 Amps
Power	3750 Watts
Contacts	SPDT or DPDT
Deadband	½ inch
MAWT	-40°F to +600°F
Enclosure	NEMA 4X
Connection	¾" FNPT

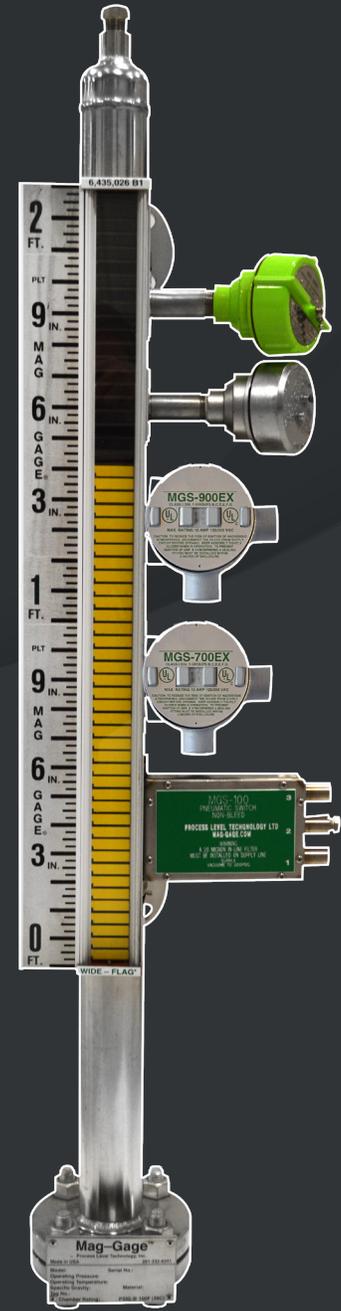

Electrical Area Classification: Class I, Division I, Groups B, C, D

MGS-100: NON-BLEED PNEUMATIC SWITCH



Type	Non-Bleed Pneumatic
Supply Pressure	VAC-200 PSIG
Deadband	½ inch
MAWT	0°F to 200°F
Enclosure	316SS
Connection	¼" FNPT



A SUPERIOR MAGNETIC CIRCUIT

When designing the magnetic circuit between the float and indicator there are many considerations other than just how strong the magnets are in the float. The Mag-Gage® level gages have undergone extensive testing to produce a rigid and high performance design. With a unique construction the indication performs under the most demanding conditions such as high/low temperatures, vibrations, even schedule 160 chambers. Our patented solid magnet Wide Flag® design not only provides highly visible indication but provides a powerful connection with the float. The reliability and repeatability of the Mag-Gage® float and indicator combination is unmatched.



CPVC Float



Kynar Float



Titanium High Pressure Float




*High Pressure Interface Float
with Field Adjustable Weight*



Standard Stainless Steel Float



Coated Float for Corrosive Process

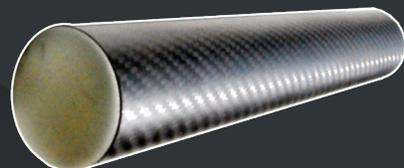

The Carbon Fiber Float® (Patented)

- All floats are engineered to the specific operating conditions of each application.
- Shell is constructed of stainless steel, titanium, hasteloy, monel, CPVC, PVDF (Kynar), or any other non-magnetic material.
- Magnetic circuit is made of a series of Alnico magnets to provide a light yet effective connection.
- We can handle the highest pressures in the industry with no oversized, pressurized or vented floats. Pressurized floats can be a safety concern and can leak over time.
- PLT uses solid engineering to conquer the demands of high pressures and low gravities.

MAG-GAGE® LIQUID LEVEL ORDERING GUIDE

Standard Specifications

- Non-Magnetic Chamber material
- All Flanges, Fittings and Pipe meet ASME/ANSI Standards
- Fabricated/Welded to B31.1/B31.3 code

Scale

- Feet and Inches, 1/4" divisions
- Photo etched and backfilled on stainless steel
- Metric, Percentage, or Volumetric available
- Optional 3 1/2" Acrylic scales


Float Chamber

- 2" to 3" pipe W/RF Flanges - Sch 40
- 1/2" FNPT vent and drain connections
- All flanges and fittings rated for process conditions
- Connections: 1/2" through 8" plus
- Pressure ratings vacuum to 5000 PSIG
- Temperature Rating: -350°F to +1100°F
- Specific gravity range: 0.28 and up
- Lengths from 4.0" to 50 feet


Indicator

- Bright colored
- Can be seen from 200 ft. or more
- 1.4" wide
- Hermetically Sealed


Chamber Styles

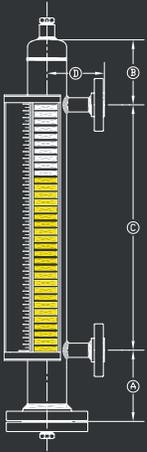


Style A

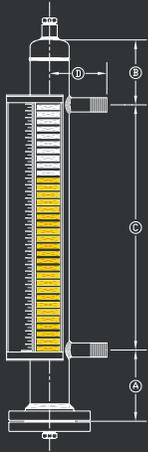


Style B

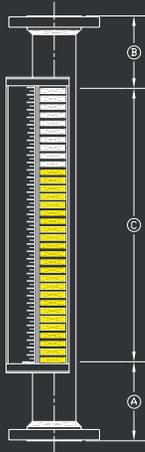


Style C

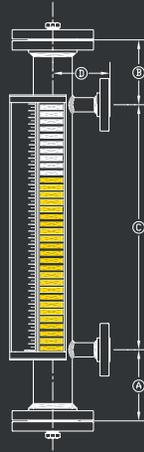


Style D

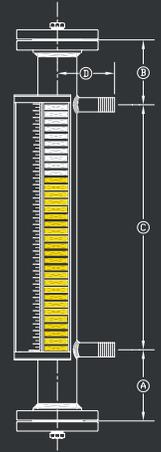


Style E

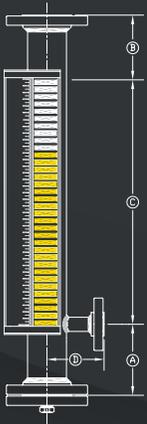


Style F

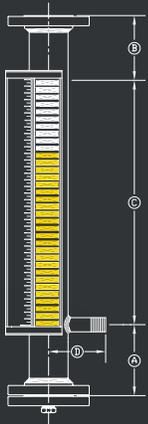

Style G

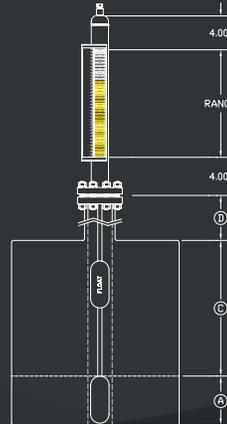

Style H

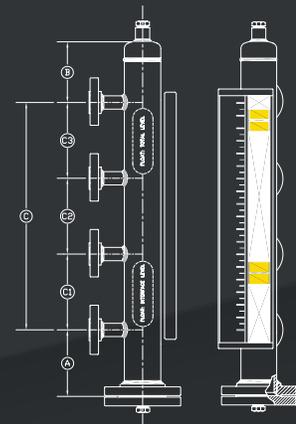

Style X (Other Configurations)



1	Model	2	Material																						
MG: Mag-Gage®		<table border="0" style="width: 100%; font-size: small;"> <tr> <td>4S: 304/304L SS</td> <td>4H: Halar Coated 304 SS</td> <td>HB: Hastelloy B</td> <td>KY: Kynar (PVDF)</td> </tr> <tr> <td>4C: 304 SS/CS</td> <td>AL: Aluminum</td> <td>HC: Hastelloy C</td> <td>PP: Polypropylene</td> </tr> <tr> <td>6S: 316/316L SS</td> <td>A2: Alloy 20</td> <td>ZR: Zirconium</td> <td>CM: Other material</td> </tr> <tr> <td>6C: 316 SS/CS</td> <td>MO: Monel</td> <td>CP: CPVC</td> <td></td> </tr> <tr> <td>2S: 321 SS</td> <td>TT: Titanium</td> <td>PV: PVC</td> <td></td> </tr> </table>				4S: 304/304L SS	4H: Halar Coated 304 SS	HB: Hastelloy B	KY: Kynar (PVDF)	4C: 304 SS/CS	AL: Aluminum	HC: Hastelloy C	PP: Polypropylene	6S: 316/316L SS	A2: Alloy 20	ZR: Zirconium	CM: Other material	6C: 316 SS/CS	MO: Monel	CP: CPVC		2S: 321 SS	TT: Titanium	PV: PVC	
4S: 304/304L SS	4H: Halar Coated 304 SS	HB: Hastelloy B	KY: Kynar (PVDF)																						
4C: 304 SS/CS	AL: Aluminum	HC: Hastelloy C	PP: Polypropylene																						
6S: 316/316L SS	A2: Alloy 20	ZR: Zirconium	CM: Other material																						
6C: 316 SS/CS	MO: Monel	CP: CPVC																							
2S: 321 SS	TT: Titanium	PV: PVC																							

3	Style
Specify Options	

4	Process Connection
Specify Size	

5	Flange Rating								
<table border="0" style="width: 100%; font-size: small;"> <tr> <td>01: 150#</td> <td>06: 600#</td> <td>15: 1500#</td> </tr> <tr> <td>03: 300#</td> <td>09: 900#</td> <td>25: 2500#</td> </tr> </table>				01: 150#	06: 600#	15: 1500#	03: 300#	09: 900#	25: 2500#
01: 150#	06: 600#	15: 1500#							
03: 300#	09: 900#	25: 2500#							

6	Specific Gravity
Specify	

7	Pressure
Unit in PSIG	

8	Temperature
Unit in Fahrenheit	

9	Length
Specify	

10	Indicator			
WF: Wide Flag® SWF: SS Wide Flag® WT: Wide Tracker® SWT: SS Wide Tracker®				

11	Options				
<table border="0" style="width: 100%; font-size: small;"> <tr> <td style="vertical-align: top;"> Chamber WN: Weld Neck Flanges LJ: Lap Joint Flanges RJ: Ring Joint Flanges BW: All Butt Weld Construction NM: NACE MR0175/MR0103 4T: Teflon Lined 304 SS NS: Non-Stick Coating DC: Dual Chamber EG: E-Gauge NST: Nano Non-Stick Treatment Valves DV: Drain Valves VD: Vent & Drain Valves (Specify Ball or Gate) </td> <td style="vertical-align: top;"> Temperature Controls CI: Low Temp. Cryogenic Insulation IB: High Temp. Insulation Blanket EH: Electrical Heat Tracing FP: Freeze Protection ST: Steam Tracing FE: Frost Extension Testing HY: Hydrostatic NDE: 100% Non-destructive Testing (Die Penetration, X-Ray) PMI: Positive Material Identification </td> <td style="vertical-align: top;"> Indication and Scale MS: Metric Scale PS: Percent Scale VS: Volumetric Scale AS: 3 ½ " Acrylic Scale FE: Non Frost Extension DI: Dual Indication IF: Interface Indication AR: Level Arrow Indicators IL: Illuma-Mag™ IG: Indicator Guard HDC: Heavy Duty Mounting Clamps </td> </tr> </table>			Chamber WN: Weld Neck Flanges LJ: Lap Joint Flanges RJ: Ring Joint Flanges BW: All Butt Weld Construction NM: NACE MR0175/MR0103 4T: Teflon Lined 304 SS NS: Non-Stick Coating DC: Dual Chamber EG: E-Gauge NST: Nano Non-Stick Treatment Valves DV: Drain Valves VD: Vent & Drain Valves (Specify Ball or Gate)	Temperature Controls CI: Low Temp. Cryogenic Insulation IB: High Temp. Insulation Blanket EH: Electrical Heat Tracing FP: Freeze Protection ST: Steam Tracing FE: Frost Extension Testing HY: Hydrostatic NDE: 100% Non-destructive Testing (Die Penetration, X-Ray) PMI: Positive Material Identification	Indication and Scale MS: Metric Scale PS: Percent Scale VS: Volumetric Scale AS: 3 ½ " Acrylic Scale FE: Non Frost Extension DI: Dual Indication IF: Interface Indication AR: Level Arrow Indicators IL: Illuma-Mag™ IG: Indicator Guard HDC: Heavy Duty Mounting Clamps
Chamber WN: Weld Neck Flanges LJ: Lap Joint Flanges RJ: Ring Joint Flanges BW: All Butt Weld Construction NM: NACE MR0175/MR0103 4T: Teflon Lined 304 SS NS: Non-Stick Coating DC: Dual Chamber EG: E-Gauge NST: Nano Non-Stick Treatment Valves DV: Drain Valves VD: Vent & Drain Valves (Specify Ball or Gate)	Temperature Controls CI: Low Temp. Cryogenic Insulation IB: High Temp. Insulation Blanket EH: Electrical Heat Tracing FP: Freeze Protection ST: Steam Tracing FE: Frost Extension Testing HY: Hydrostatic NDE: 100% Non-destructive Testing (Die Penetration, X-Ray) PMI: Positive Material Identification	Indication and Scale MS: Metric Scale PS: Percent Scale VS: Volumetric Scale AS: 3 ½ " Acrylic Scale FE: Non Frost Extension DI: Dual Indication IF: Interface Indication AR: Level Arrow Indicators IL: Illuma-Mag™ IG: Indicator Guard HDC: Heavy Duty Mounting Clamps			

MAG-TRANS® PREMIER LEVEL TRANSMITTER

The Mag-Trans® 2523 Series Level Transmitter is the next generation in Magnetostrictive Level Sensing Technology. It contains a dual compartment enclosure attached to the piezomagnetic wave guide sensor. The output is reliable, repeatable, fast and accurate.

- Standardized Dual Compartment
- Stainless Steel Enclosure Option
- Two Wire: Loop Powered
 - 10-30 Vdc (24 Vdc Nominal)
- Graphic Display:
 - Inch-Metric-Percent
 - Scroll-Tile
- HART – Protocol
- PACTware
- Local Programming
- Repeatable
- Reliable
- Variable Range
- Process Temperatures: -50°F to +800°F
- Class 1, DIV 1, GRP B, C, D



Specifications

Accuracy	+/- 0.015
Repeatability	.001% Full Span
Linearity	.020% Full Span
Refresh Rate	25x per second
Damping	1.0-25.0 Seconds
Electrical Classification	Class 1, Div 1, Grp B, C, D

Input	10-30 Vdc (24 Vdc Nominal)
Output	4-20mA, HART
Software	HART/PACTware
Display	LCD-Graphic
Process Temperature	-50°F to 800°F
Ambient Temperature	-25°F to 175°F



FIELD COMM GROUP
Connecting the World of
Process Automation



MAG-TRANS® ORDERING GUIDE



1	Model	2	Length	3	Mounting Location	4	Dual Compartment Housing Material
MT 2523		Unit in Inches		BML: Bottom Left TML: Top Left BMR: Bottom Right TMR: Top Right		ALE: Epoxy Coated Aluminum SSE: All 316 Stainless Steel	

5	Probe Material
6S: 316 Stainless Steel	

6	Temperature
Unit in Fahrenheit	

7	Options
HT: High Temp RD: Remote Display FM: FM Approved US/Canada FRD: Field Mounted Loop Powered Indicator FRDS: All Stainless Steel FRD	




FRD: Field Mounted, Loop Powered Indicator - Can be externally mounted anywhere within power loop. Epoxy Coated Aluminum or 316 SS Class1, Div1, Group B, C, D

FRDS: All 316 Stainless Steel


Installation Options

LEFT MOUNTING POSITION

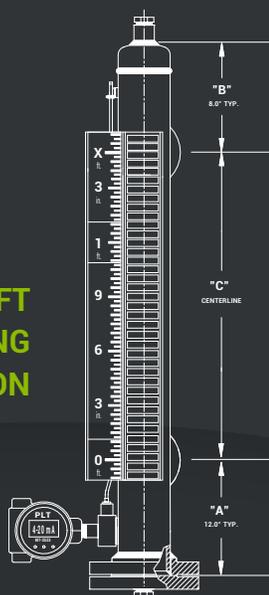

BML


RIGHT MOUNTING POSITION

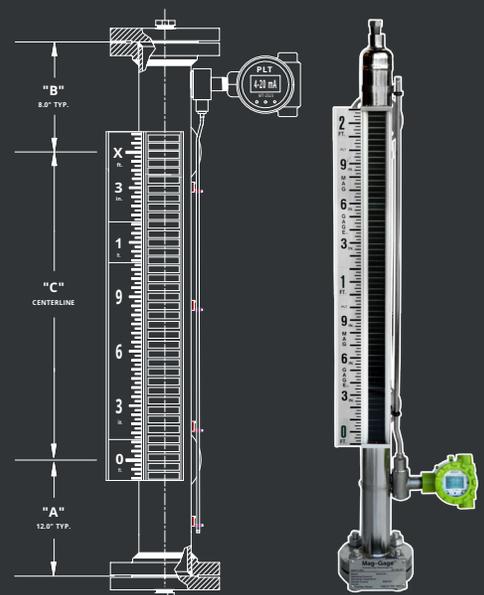


TMR

BMR


GENERAL INSTALLATIONS

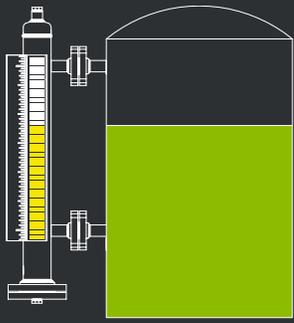


Style A

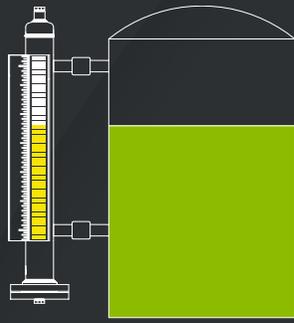


Style B

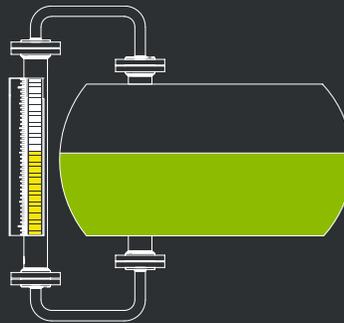


Style C

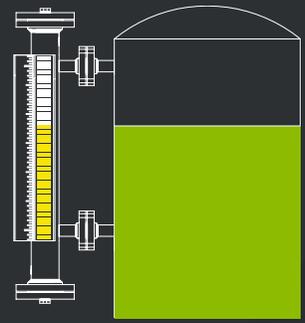


Style D

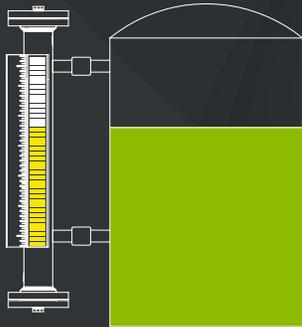


Style E

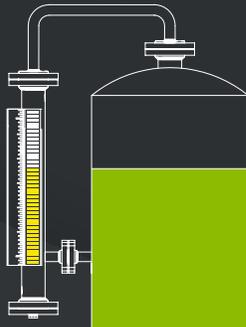


Style F

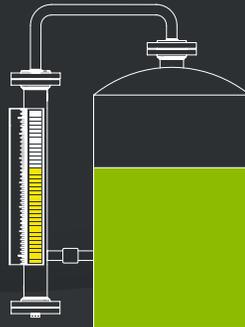

Style G

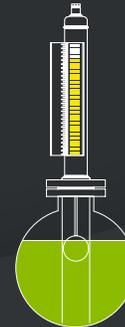

Style H

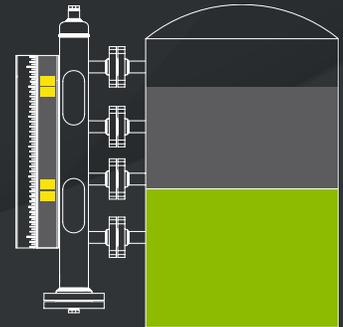

Style X

Applications

- Acetic Acid
- Ammonia
- Asphalt Settler
- Benzene
- Blow case
- Boiler Steam Drum
- Butane
- Caustics
- Cooling Towers
- Deionized Water
- Dow Therm
- Drip Pot
- Feedwater Heaters
- Flare Drums
- Freon
- Glycol
- Hydraulic Oil
- Hydrazine
- Hydrochloric Acid
- Hydrofluoric Acid
- Hydrogen Sulfide
- Interface (i.e. oil/water)
- Jet Fuel
- LPG
- Liquid Carbon Dioxide
- Liquid Ethylene
- Molten Sulfur
- Phosgene
- Propylene
- Propane
- Seal Oil Pots
- Slop Oil
- Sour Oil
- Sump Tank
- Underground Storage
- and more...

Other Products



Bypass



IT2523



Seal Pot




Day Tanks

OPTIONS AND CUSTOMIZATIONS



SANITARY MAG-GAGE®

Tri-colored flags

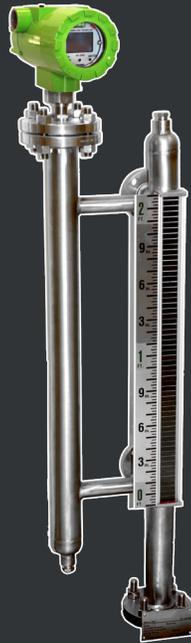

DUAL CHAMBER

*Options: MAG-TRANS®,
Guided Wave Radar*




PLASTICS


Options: CPVC, KYNAR, Others



HIGH TEMPERATURE INSULATION

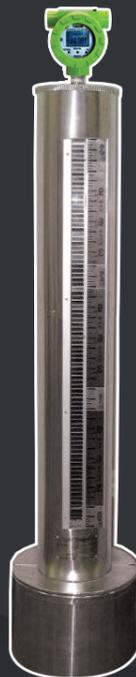

CRYOGENIC INSULATION

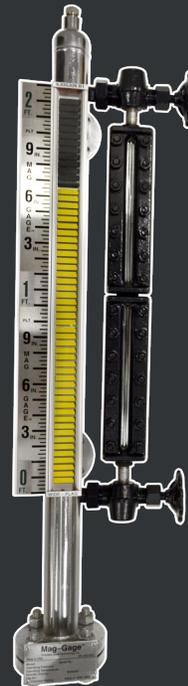

INTEGRAL SIGHTGLASS

INQUIRIES

Upon product inquiry, a thorough analysis of the customer's application and product specifications is performed. Promptly after the initial inquiry, PLT issues a quotation in complete compliance with the application/specifications previously submitted.

DELIVERABLES

After purchase date, a standard shipping term between 2 to 4 weeks will be issued with all standard orders. Requests for a faster delivery, or immediate (24 hour) delivery can be accommodated. Any delivery requirements are to be given with initial inquiry in order to ensure on time delivery.



Process Level Technology, Ltd.
MAG-GAGE®

888 Clear Creek Ave.
League City, TX 77573

Phone 281 332 6241

Fax 281 332 0232

www.mag-gage.com



MADE IN USA